

Air Conditioning, Heating, Refrigeration

Product Catalog

- Condensate Removal
- Ice Machine Replacement
- Evaporative Cooler
- Accessories



What's New!

NXTGen.

New from the proven leader in condensate pump technology... the slimmest tank-style condensate pump for the biggest installation flexibility.

Engineered with contractor input and Little Giant® quality, our new line of **NXTGen™ condensate pumps** is designed to outsmart, outlast, out-cool, out-quiet, and out-perform every other condensate pump out there.

More new features

A slimmer footprint ... an oil-resistant tank and check valve that eliminate the problem of cracked tanks exposed to oil ... and numerous other features not available on competitor models comprise this next generation of cool. Making NXTGen the pump of choice for removal of condensate from air conditioning, refrigeration, and condensing boiler applications.

The name to know and sell

With its 66-year history of commercial pumps and pump systems, Little Giant is one of the most powerful brand names in air conditioning, heating and refrigeration, recognized worldwide for its quality and reliability.

Available with Multiple Options

External Safety Switch (optional)

Optional External Safety Switch for easy access, greater installation flexibility, and up-sell potential.



VCMX-20UL



See your distributor for more information, or email Franklin Electric at export@LittleGiantPump.com.

- Condensate Removal
- Ice Machine Replacement
- Evaporative Cooler
- Accessories



Table of Contents

Condensate Removal Pumps

VCMX Series	3
VCMA Series	4
VCC Series	5
VCL Series	5-6
ABS Series	6-7
EC-OP Series	8
EC Series	9
PC Series	10

Ice Machine Replacement Pumps

RIM-U	11
-----------------	----


Evaporative Cooler Pumps

CP Series	12
---------------------	----

Accessories

Safety Switches	13
CondaAlert	13
Check Valves	14

More than 400 people work on behalf of the customer at our Oklahoma City facility.

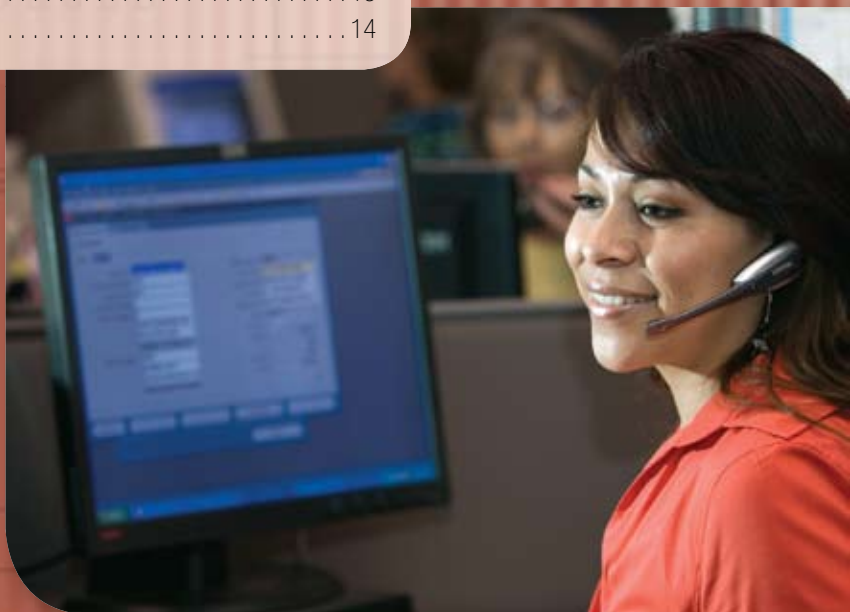

Condensate Removal Pumps

VCMX SERIES

High Capacity Model



VCMX-20S
NXTGen



Applications

- For removal of condensate from air conditioners, condensing boilers, refrigerated display cabinets, and dehumidifiers

Features

- Fully automatic: start, stop, safety switch
- Check valve outlet: 9.5 mm, for 9.5 mm ID tubing
- IP 24
- CE approved
- Options: safety switch, 6 m of 9.5 mm tubing and anti-sweat sleeve
- 1/30 HP high performance motor


Series Specifications

Shut Off: 4.8 m

Electrical: 230V, 50Hz
0.6A, 60W

Operation: Automatic

Performance Curve VCMX-20S 230V, 50Hz

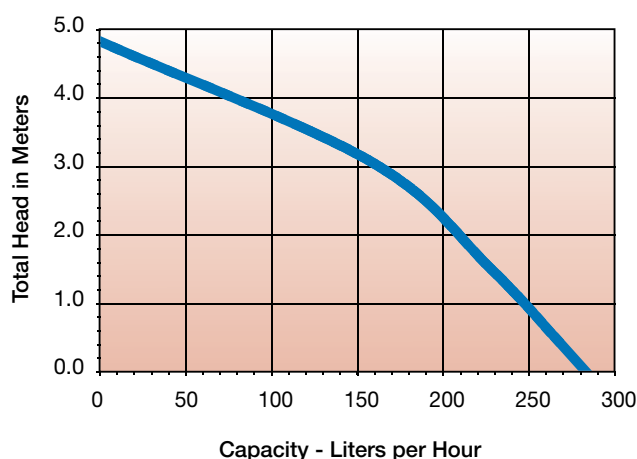

Model Characteristics

NXTGen				
Model	Volts	Cable (m)	Plug	Weight (Kg.)
VCMX-20S	230	3	Yes	2.72
VCMX-20S	230	1.8	No	2.72
VCMX-20UL	230	1.8	Yes	2.27
VCMX-20ULS	230	1.8	Yes	2.54

NXTGen With Tubing				
Model	Volts	Cable (m)	Plug	Weight (Kg.)
VCMX-20ST	230	3	Yes	2.72
VCMX-20ST	230	1.8	No	2.72

NXTGen With Anti-Sweat Sleeve				
Model	Volts	Cable (m)	Plug	Weight (Kg.)
VCMX-20S-C	230	1.8	No	2.72

External Overflow Safety Switch	
Model	Description
ACS-X10	Safety Switch with 254 mm Leads
ACS-X72	Safety Switch with 183 cm Cable
Anti-Sweat Sleeve	
Model	Description
VCMX-CK	Tank Sleeve with Mounting Bracket



VCMX-20S



VCMX-20ST
with Tubing



VCMX
External Safety
Switch (optional)



VCMX-20S-C
with Anti-Sweat Sleeve



Fast & easy
wall mounting



Replacement
Check Valve

Condensate Removal Pumps

VCMA SERIES

High Capacity Model

Applications

- For removal of condensate from air conditioners, condensing boilers, refrigerated display cabinets, and dehumidifiers

Features

- Fully automatic: start, stop, safety switch
- Includes removable 9.5 mm diameter check valve/non-return valve
- 2.0 L tank capacity
- Thermally protected motor
- IP 20
- CE approved
- Options: 6 m tubing (VCMA-20ST) and/or CEE electric plug
- 1/30 HP high performance motor
- ABS tank, motor cover, and volute
- Stainless steel shaft
- Removable 9.5 mm barbed check valve
- 3 inlet drain holes
- Includes cup plugs to close unused inlets

Series Specifications

Shut Off: 4.3 m

Electrical: 230V, 50Hz

Maximum Liquid

0.6A, 60W

Temperature: 50°C

Operation: Automatic

Discharge: 9.5 mm



Impeller: Glass-filled polypropylene

Model Characteristics


Model	Volts	Cord	Shut Off	Weight (Kg.)
VCMA-20S	230	1.83 m	4.3 m	2.26
VCMA-20ST	230	1.83 m	4.3 m	2.72



VCMA-20S

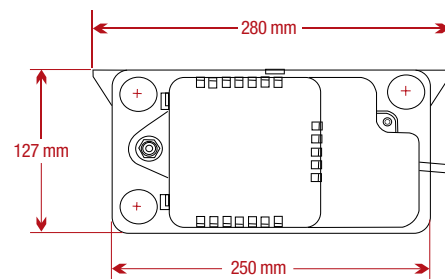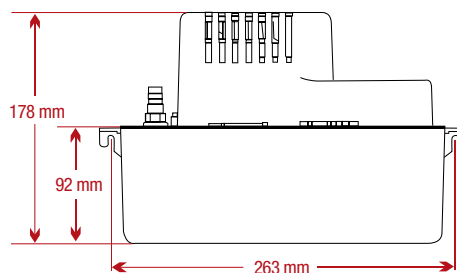

Performance Curve VCMA-20S 230V, 50Hz

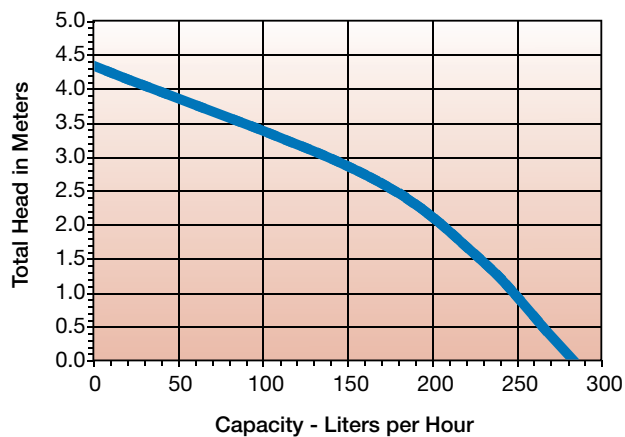

Condensate Removal Pumps

VCC SERIES

Low Profile

Compact Tank

VCC-20S



Applications

- For removal of condensate from air conditioners, condensing boilers, refrigerated display cabinets, and dehumidifiers



Features

- Fully automatic: start, stop, safety switch
- Includes removable 9.5 mm diameter check valve/non-return valve
- 1.0 L tank capacity
- Thermally protected motor
- IP 20
- CE approved
- Options: 6 m tubing
- Low profile for limited space applications
- 1/30 HP motor
- ABS tank, motor cover, and volute
- Stainless steel shaft
- Removable 9.5 mm barbed check valve

Series Specifications

Shut Off: 4.3 m

Maximum Liquid

Temperature: 50°C

Discharge: 9.5 mm

Electrical: 230V, 50Hz


0.6A, 60W

Operation: Automatic

Model Characteristics

Model	Volts	Cord	Dimensions (mm)			Weight (Kg.)
			Height	Length	Width	
VCC-20S	230	1.8 m	127	300	125	2.44

Performance Curve VCC-20S 230V, 50Hz

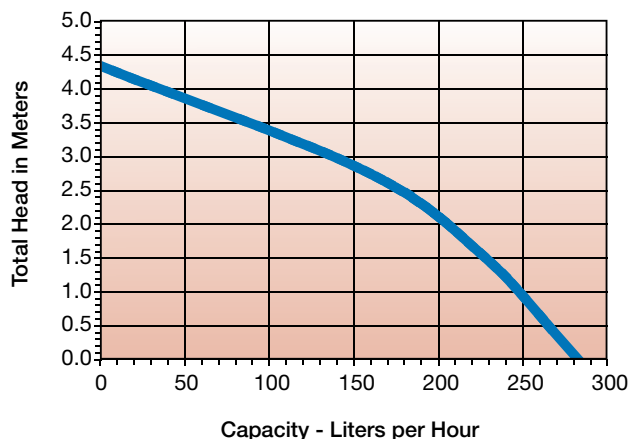

VCL-24S SERIES

Super High Capacity

Large Tank

VCL-24S



Applications

- For removal of condensate from air conditioners, condensing boilers, refrigerated display cabinets, and dehumidifiers



Features

- Fully automatic: start, stop, safety switch
- Includes removable 9.5 mm diameter check valve
- 4 L tank capacity
- Thermally protected motor
- IP 20
- CE approved
- Outlet: 9.5 mm diameter adapter
- Large reservoir and high capacity output for large scale applications
- 1/15 HP motor
- Galvanized steel tank cover
- ABS tank, volute and switch cover
- Stainless steel shaft
- Snap-action switch

Series Specifications

Shut Off: 5.9 m

Maximum Liquid

Temperature: 50°C

Discharge: 9.5 mm

Electrical: 230V, 50Hz


1.0A, 150W

Operation: Automatic

Model Characteristics

Model	Volts	Cord	Dimensions (mm)			Weight (Kg.)
			Height	Length	Width	
VCL-24S	230	1.8 m	263	305	150	3.9

Performance Curve VCL-24S 230V, 50Hz

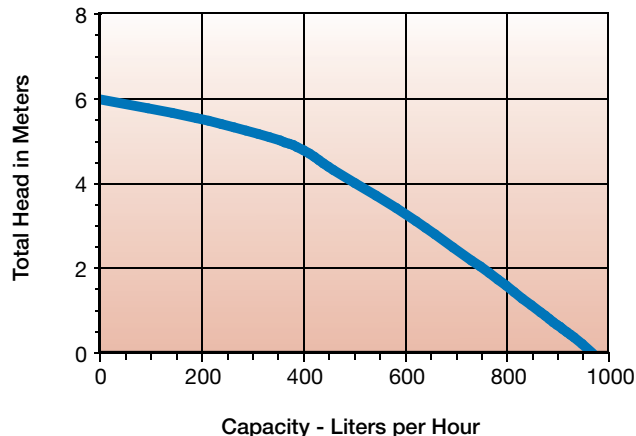

Condensate Removal Pumps

VCL-45S SERIES Super High Capacity Large Tank



VCL-45S

Applications

- For removal of condensate from air conditioners, condensing boilers, refrigerated display cabinets, and dehumidifiers



Features

- Fully automatic: start, stop, safety switch
- Outlet: 9.5 mm, for 9.5 mm ID tubing
- 4 L tank capacity
- Thermally protected motor
- IP 20
- CE approved
- 1/4 HP motor
- Galvanized steel tank cover
- ABS tank, volute and switch cover
- Stainless steel shaft
- Snap-action switch

Series Specifications

Shut Off: 10.5 m

Maximum Liquid

Temperature: 50°C

Discharge: 9.5 mm


Electrical: 230V, 50Hz
0.8A, 170W

Operation: Automatic

Model Characteristics

Model	Volts	Cord	Dimensions (mm)			Weight (Kg.)
			Height	Length	Width	
VCL-45S	230	0.9 m	267	305	150	14

Performance Curve VCL-45S 230V, 50Hz

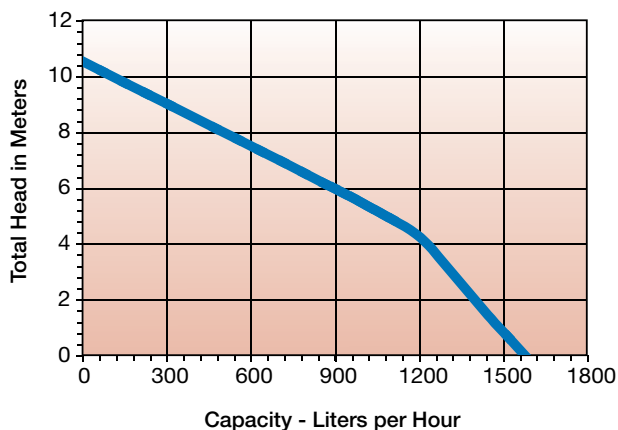

1-ABS SERIES Shallow-Pan Tank



1-ABS

New improved switch design

Applications

- For removal of condensation from an air conditioner drain pan or reservoir
- Designed for use in existing drip tray



Features

- Fully automatic start and stop
- 1/150 HP oil filled motor
- Epoxy coated cast aluminum housing and motor cover
- Nylon volute
- Stainless steel shaft
- Nitrile shaft seal
- Switch housing ABS
- Low level on and off operation: On level 3.8 cm, Off level 2.5 cm
- Screened intake
- Advanced mechanical switch
- IP 68
- CE approved

Series Specifications

Shut Off: 2.5 m

Maximum Liquid

Temperature: 50°C

Discharge: 6 mm threaded

Impeller: Nylon


Electrical: 230V, 50Hz, 1.1A
0.6A, 70W

Operation: Automatic

Model Characteristics

Model	Volts	Cord	Dimensions (mm)			Weight (Kg.)
			Height	Length	Width	
1-ABS	230	3.3 m	110	186	94	2.2

Performance Curve 1-ABS 230V, 50Hz

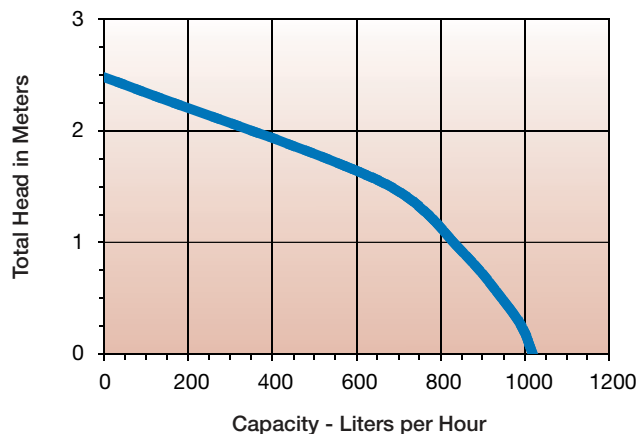

Condensate Removal Pumps

2-ABS SERIES Shallow-Pan Tank

2-ABS



Applications

- For removal of condensation from an air conditioner drain pan or reservoir



Features

- 1/40 HP oil filled motor
- Epoxy coated cast aluminum housing
- Includes 2.0 L tank
- Nylon volute
- Stainless steel shaft
- Viton® shaft seal
- Hooded intake
- Advanced mechanical switch
- Thermal overload protection
- IP 68
- Switch housing ABS

Series Specifications

Shut Off: 2.74 m

Maximum Liquid Temperature: 50°C

Discharge: 6 mm threaded

Impeller: Nylon


Electrical: 230V, 50Hz,
0.9A, 100W

Operation: Automatic

Model Characteristics

Model	Volts	Cord	On Level	Off Level
2-ABS	230	3.3 m	6.4 cm	3.8 cm

Performance Curve 2-ABS 230V, 50Hz

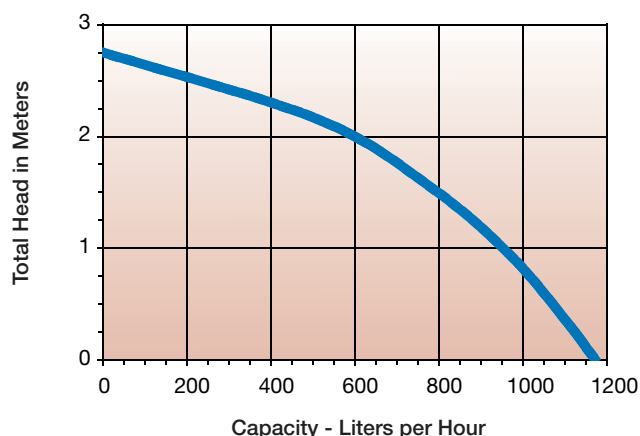

3-ABS SERIES Shallow-Pan Tank

3-ABS



Applications

- For condensate removal



Features

- 1/12 HP oil filled motor
- Epoxy coated cast aluminum housing and motor cover
- Galvanized steel tank cover
- ABS tank included
- 3.8 L tank capacity
- Nylon volute
- Stainless steel shaft
- 1/2" MNPT discharge with brass check valve for 12.7 mm OD, rigid plastic or copper
- Viton® shaft seal
- Advanced mechanical switch
- Thermal overload protection
- IP 68

Series Specifications

Shut Off: 5.75 m

Maximum Liquid Temperature: 50°C

Discharge: 12" mm

Impeller: Nylon


Electrical: 230V, 50Hz,
1.8A, 210W

Operation: Automatic

Model Characteristics

Model	Volts	Cord	On Level	Off Level
3-ABS	230	3.4 m	8.1 cm	5.6 cm

Performance Curve 3-ABS 230V, 50Hz

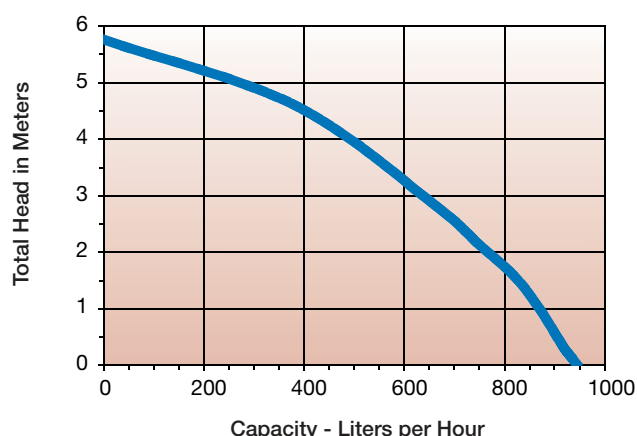

Condensate Removal Pumps

EC-OP SERIES Mini-Split/Ductless

Applications

- Removes condensate from wall mounted, ceiling and fan coil air conditioning equipment

Features

- Pump float retainer for easy serviceability
- Clear reservoir for visual inspection of water level, float and filter
- Safety alarm ready
- 8A resistive – 250V alarm contact
- 8 mm inlet tubing with universal adapter
- 4 mm discharge tubing with 6 mm adapter
- 40 m maximum horizontal distance
- IP 54 protection
- 80°C thermal protection
- Safety alarm ready, suitable for BMS systems
- CE approved, RoHS compliant

EC-OP-K:

- 30 cm trunking for optional use
- Easy to install mounting bracket
- Stylish pump unit cover – fits any décor
- Easy to service without removing from the wall

Series Specifications

Shut Off: 9 m

Ambient Temperature: 0° - 40°C

Discharge: 6 mm

Material: Flame retardant ABS

Electrical: 230V, 50Hz, 20W

Fuse: 3A (recommended, not included)

Operation: Automatic

Model Characteristics

Model	Volts	Hertz	Dimensions (mm)			Weight (Kg.)
			Height	Length	Width	
EC-OP	230	50	65	140	57	0.68
EC-OP-K	230	50	89	210	81	1.36




EC-OP



The EC-OP has a unique design that reduces vibration and operating noise while improving sustained, maximum pumping performance making it ideal for a wide range of environments. The design also provides quieter starting and stopping of the pump motor.

It is an ideal choice when conduit (trunking) is not required. However, it also works well when conduit is required to conceal exposed electrical wiring and refrigeration lines. The unit is adaptable to any situation; it can be installed on the right side (default) or left of the air handler.

Model EC-OP (pump only) includes all wiring and tubing necessary to install the pump but does not include the mounting bracket, cover or 30 cm conduit/ceiling cap.

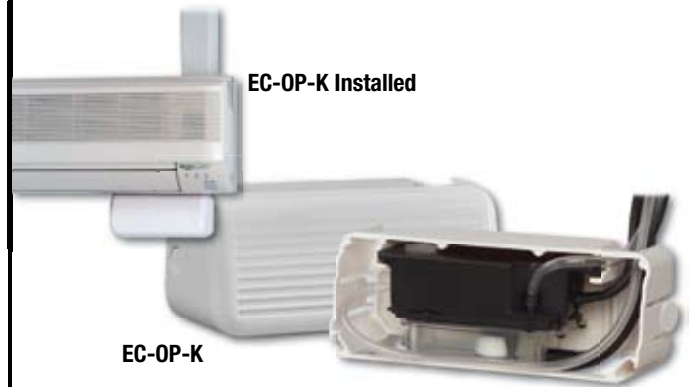


EC-OP-K Installed

EC-OP-K

The kit, model EC-OP-K comes complete with EC-OP pump, pump concealing cover, 30 cm conduit, ceiling plate and all hardware necessary for fast and easy installation. A template is provided for quick and accurate location beneath any air handler.

Performance Curve EC-OP : EC-OP-K 230V, 50Hz

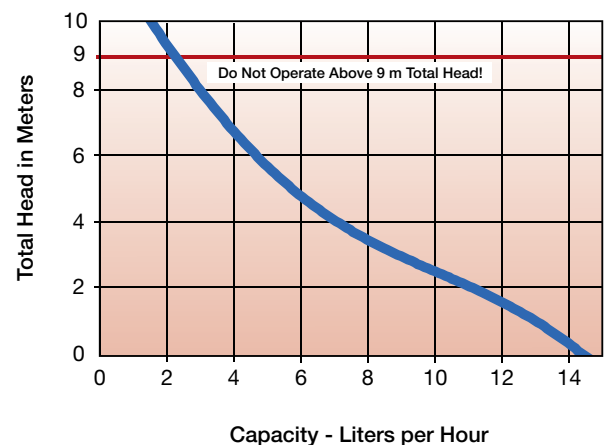

Condensate Removal Pumps

EC SERIES Mini-Split/Ductless

Applications

- Removes condensate from wall mounted, ceiling and fan coil air conditioning equipment

Features

- Fully automatic: start, stop, overflow detection (for alarm or equipment shut-down)
- Compact two-piece design for quick and flexible installation
- Pump is self priming and can be placed inside air handler or located up to 1 m above reservoir
- Reservoir connects to 13-17 mm condensate drain
- Use with air conditioning equipment up to 10 kW (25,000 BTU) (4 kW in tropical areas)
- Reservoir vent with tube included
- Thermally protected motor
- Pump outlet designed for 6 mm/1/4" ID tubing
- Pump/control dimensions: 110 mm x 35 mm x 45 mm
- Reservoir dimensions: 80 mm x 37 mm x 35 mm
- CE approved
- IP 20
- Includes:
 - Suction tubing: 1 m x 4 mm ID
 - Vent tubing: 150 mm x 4 mm ID
 - A/C drain tubing: 75 mm x 13 mm ID

Series Specifications

Capacity: 9.5 LPH @ 0 m
Shut-Off: 12 m

Electrical: 230V, 50Hz,
0.1A, 20W

Operation: Automatic

Fuse: 0.2 A (Recommended, not included)


Model Characteristics

Model	Volts	Hertz	Weight (Kg.)
EC-400	230	50/60	0.45
EC-400	230	60	0.45



The EC-400 is a complete pumping system designed to remove condensate from wall mounted, ceiling and fan coil split air conditioning equipment when gravity drainage is not possible. The EC-400 consists of two components, the pump/control and float-sensor/reservoir. The compact two-piece design allows for easy installation in most systems. Both components can be placed inside the air handler or the pump/control can be placed up to 1.0 m above the air handler in the ceiling void or inside trunking conduit. A three position symmetrical float sensing system assures reliable ON, OFF and SAFETY ALARM functions. Intake tubing, tube clamps, adhesive tape, vent, and a/c drain tubing included.

Performance Curve EC-400 230V, 50Hz

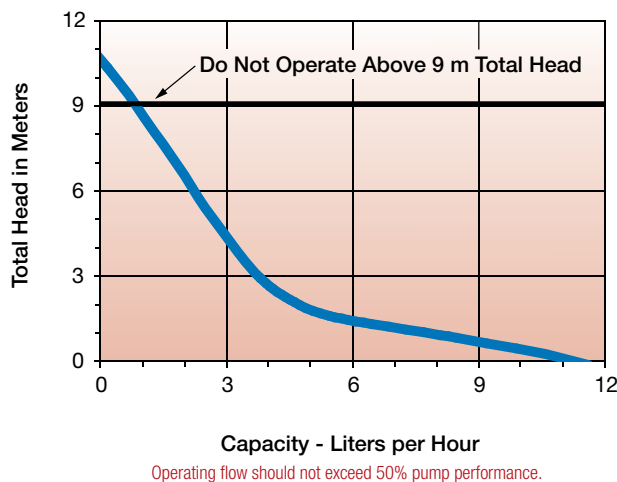

Condensate Removal Pumps

PC SERIES

Peristaltic

Applications

- Self-priming pump that removes condensate from air conditioning systems

Features

- Not affected by dust, bacteria, mold or airborne particles found in condensate
- CE approved
- IP 52
- Glass-reinforced polycarbonate pump/motor housing
- Hinged tube cover
- Extra tube assembly included
- Santoprene® tube
- Easy to replace pump tube – no tools required
- 5-minute “off” delay (PCS and PCT models)
- Impedance protected motor
- Test switch
- Double insulated pump/motor
- Wall bracket included
- Recommended for systems up to 12 kW (6 kW in tropical areas)

Designed for Air Conditioners:

- Single/multi-split wall units
- Fan-coils
- Cassettes
- Ceiling mounted
- Wall console units

Series Specifications

Shut Off: 14 m

Suction Lift: 2 m

Inlet/Outlet: 6 mm ID

Electrical: 230V, 50Hz

0.06A, 13W

Alarm Contact: 5A (PCR-10S only)


Model Characteristics

Model	Volts	Cord	Dimensions (mm)			Weight (Kg.)
			Height	Length	Width	
PCS-10	230	1.98 m	114.8	95.5	98.3	1.13
PCT-10	230	1.98 m	114.8	95.5	98.3	1.19
PCR-10	230	1.98 m	114.8	95.5	98.3	1.23
PCR-10S	230	1.98 m	114.8	95.5	98.3	1.30



PC condensate pumps can be located in the ceiling void and lift water from wall, floor, ceiling or cassette air conditioning units up to 12 kW. Quieter than other condensate pumps, Little Giant PC pumps feature a totally enclosed motor (no ventilation required), “press-to-activate” switch, 5-minute “off” delay (PCS and PCT), easy to replace pump tube and mounting bracket.

Performance Curve PC 230V, 50Hz

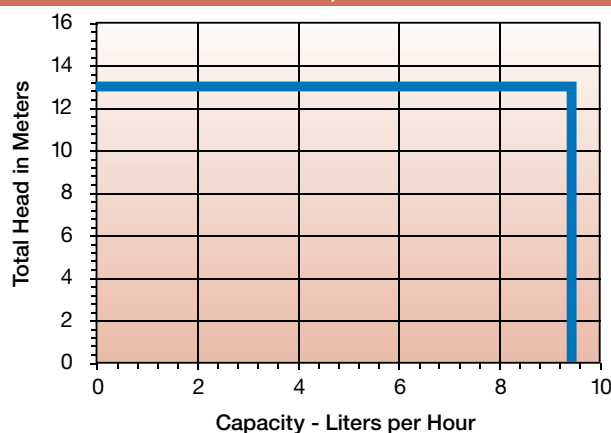

PCS-10

Controlled by compressor or cooling signal. Requires a 24VAC to 250VAC signal.



PCT-10

Controlled by change in temperature of air moving through air conditioner coil. Thermal sensors continuously measure difference in “air in” and “air out”; when temperature difference reaches 5°C, pump starts. Sensor cable is 2 m.



PCR-10

Controlled by float-operated switches. Activates when water enters float reservoir. Reservoir cable is 1 m.



PCR-10S

Controlled by float-operated switches. Activates when water enters float reservoir. Reservoir cable is 1 m. Incorporates overflow control circuit with 5A volt-free alarm contact.

Ice Machine Replacement Pumps

RIM-U



Applications

- Universal replacement unit for OEM pumps

Features

- 1/25 HP motor, dual voltage 115/230V, 50/60 Hz motor
- Screened intake
- NSF-listed ABS volute, base and discharge adapters
- Stainless steel shaft
- 4 lead wires, 9 mm in length
- Thermal overload protection
- UL-EPH listed

Series Specifications

Capacity: See below

Maximum Liquid

Temperature: 50°C

Discharge: 15.8 mm Y, 12.7 mm, 15.8 mm, 19.1 mm & 24.5 mm OD tubing

Impeller: NSF-listed ABS

Electrical: 115/230V, 50/60Hz, 1.5/0.75A

Model Characteristics

Model	Volts	Weight (Kg.)
RIM-U	115/230	2.26

Impeller Diameter	Discharge Adapter (ID Tubing Size)	Flow - Gallons / Liters per Hour 2 ft / 0.6 m	
		LPH	GPH
44.5 mm / 1.75"	12.7 mm / 1/2"	1097	290
	15.8 mm / 5/8"	1646	435
	19.1 mm / 3/4"	2044	540
	24.5 mm / 1"	2214	585
46.5 mm / 1.83"	12.7 mm / 1/2"	1362	360
	15.8 mm / 5/8"	2081	550
	19.1 mm / 3/4"	2649	700
	24.5 mm / 1"	3066	810
49.5 mm / 1.95"	12.7 mm / 1/2"	1457	385
	15.8 mm / 5/8"	2271	600
	19.1 mm / 3/4"	2876	760
	24.5 mm / 1"	3122	825
53.3 mm / 2.10"	12.7 mm / 1/2"	1514	400
	15.8 mm / 5/8"	2271	600
	19.1 mm / 3/4"	2649	700
	24.5 mm / 1"	2876	760

Evaporative Cooler Pumps

CP SERIES




Applications

- For use in evaporative coolers, displays, laboratories, water transfer and other applications; replacement units for OEM equipment


Features

- Heavy duty concentric fan-cooled motor
- Corrosion-resistant, one-piece steel motor shaft
- Moisture-proof windings
- Oversized sleeve bearings with large oil reservoir
- Universal mounting configurations
- 90° barbed elbow with bleed-off
- Discharge elbow fits 12.7 mm, 15.9 mm or 19.1 mm ID flexible tubing (540015); and 15.9 mm and 19.1 mm ID flexible tubing (541015 and 542015)
- Low pump down and recovery levels
- Flame retardant housing
- Snap-off volute plate for easy cleaning
- Mesh debris screen
- Thermal overload protection
- UR approved

Performance Curve CP1 230V, 50Hz

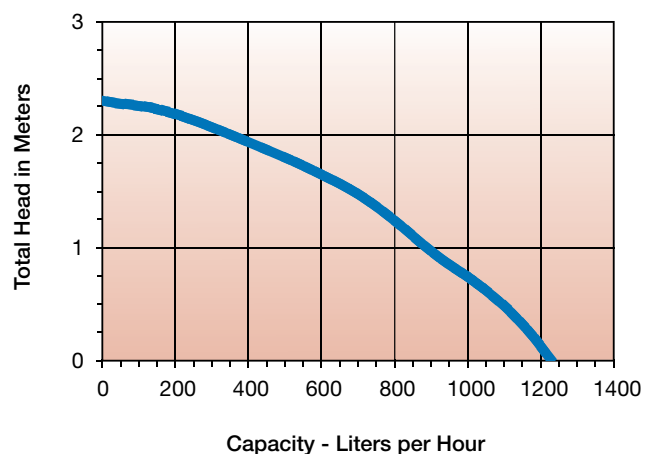

Universal Mounting Configurations

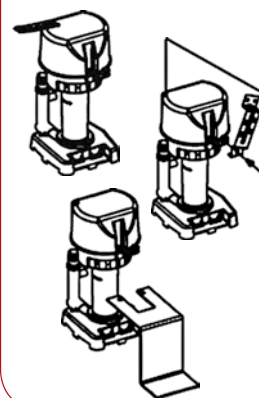


Model Characteristics


Model	HP	Volts	Capacity	Shut Off	Cord	CFM Rating	Replaces
CP1-230	1/70	230	1162 LPH @ 0 m	2.3 m	1.2 m	5000 - 7500	CP-6500, CP-6500T, CP-651TLLUR, CP-652T-LLUR
CP2-230	1/50	230	1900 LPH @ 0 m	2.3 m	1.2 m	7500 - 15000	CP-10000, CP-10000UR, CP-211T-LLUR, CP-212T-LLUR
CP3-230	1/30	230	2131 LPH @ 0 m	2.8 m	1.2 m	15000 - 21000	CP-15000, CP-15000UR

All pumps include mounting bracket, low level operation, filter screen, 1.2 m cable.

Performance Curve CP2 230V, 50Hz

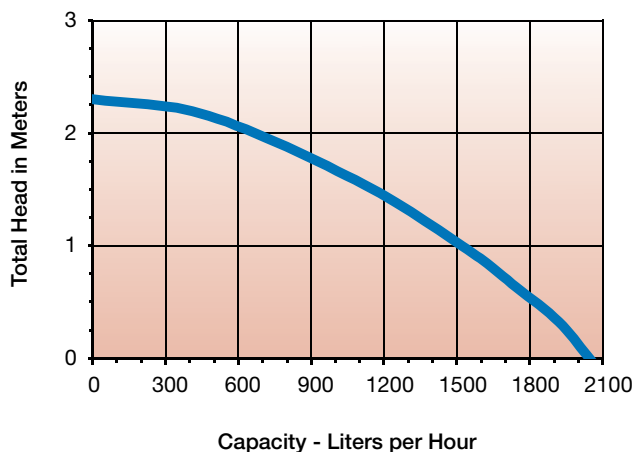

Performance Curve CP3 230V, 50Hz

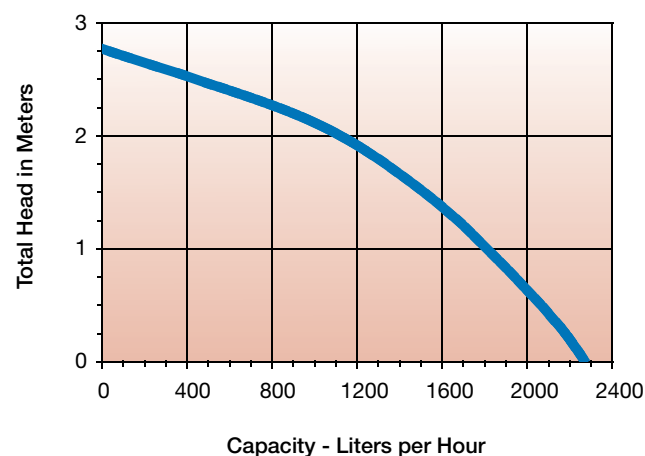

Accessories

Auxiliary Condensate Overflow Safety Switch

Applications

- Installs in the condensate drain pan of air conditioning or refrigeration units; reliable equipment shutdown when overflow conditions are detected

Features

- Can install switch to activate audible and/or visual alarm
- ABS housing
- ABS float
- Low voltage
- Lead wires
- UR / C-USA listing



Model Characteristics

Model	Wire	Max. VAC	Max. Amps
ACS-2	0.45 m	48 VAC/VDC	5
ACS-2	1.8 m	48 VAC/VDC	5
ACS-3	1.8 m	125-250 VAC/VDC	11

Secondary Condensate Overflow Safety Switch

Applications

- Installs in primary drain pan's auxiliary outlet to detect downstream clogs; reliable equipment shutdown

Features

- Can install switch to activate audible and/or visual alarm
- Low voltage
- Lead wires
- Includes 3/4" MNPT x 3/4" slip adapter
- cULus listing



Model Characteristics

Model	Wire	Max. VAC	Max. Amps
ACS-5	1.8 m	24VAC	5

In-Line Condensate Overflow Safety Switch

Applications

- Installs in drain lines to detect downstream clogs; reliable equipment shutdown

Features

- Can install switch to activate audible and/or visual alarm
- Low voltage
- Lead wires
- 3/4" plug, 3/4" slip x 3/4" MNPT
- Includes 25.4 mm x 19.1 mm adapter
- cULus listing



Model Characteristics

Model	Wire	Max. VAC	Max. Amps
ACS-4	1.8 m	24VAC	5

Condalert Condensate Overflow Detection

Applications

- For reliable equipment shutdown or warning when leaks and drain overflow conditions are detected

Features

- Control shutdown
- LED indicator
- 24VAC, 1A
- Solid state water detection circuit
- Mechanical relay switch
- Designed for air handling industry
- Lead wires



Model Characteristics

Model	Wire	Drain	Alarm
LC-110	3 m	Secondary pan	Audible buzzer
LC-210	3 m	Secondary pan	—
LC-310	3 m	Primary line and secondary pan	Audible buzzer
LC-410	3 m	Primary line and secondary pan	—

Accessories

CV-2 Check Valve



- For 1-ABS or 2-ABS Series pumps
- Use 1/4" FNPT to 6.35 mm OD tubing

Model

CV-2

CV-4 Check Valve



- For 3-ABS Series pumps
- Use 1/2" FNPT to 12.7 mm OD rigid-plastic or copper tubing

Model

CV-4

CV-10 Check Valve



- For VCC Series, VCMA Series and VCL-24 pumps
- Use 1/4" MNPT to 9.5 mm ID vinyl tubing

Model

CV-10

CV-35 Check Valve



- For VCL-45 Series
- Use 9.5 mm OD rigid plastic or copper tubing on both ends

Model

CV-35

CV-14/24 Check Valve



- For VCC Series, VCMA Series and VCL-24 pumps
- Use 1/4" MNPT to 9.5 mm OD rigid plastic or copper tubing

Model

CV-14/24

CV-15/20 Check Valve



- Brass check valve for VCMA
- Use 1/4" MNPT to 9.5 mm OD rigid plastic or copper tubing

Model

CV-15/20

ERC Extension Cable



- 1 meter extension cable for PCT-10 temperature sensor and PCR-10, PCR-10S and EC-400 reservoir assembly

Model

ERC

Reservoir Assembly



- Replacement reservoir assembly for EC-400, PCR-10 and PCR-10S pumps

Model

Reservoir Assembly

T-RPC-10 Tube



- Replacement tube assembly for PC-10 pumps

Model

T-RPC-10

PC-10 Pump Repair Kit



- Replacement roller and tube kit for PC-10

Model

PC-10-PRK

NOTES:

About Our Company.

In 2006, Franklin Electric Company acquired Little Giant Pump Company to solidify our position as a leading global supplier of water pumping systems for residential and commercial markets. Little Giant® products – sump, sewage, effluent, utility, condensate removal, and submersible industrial pumps – complement and broaden Franklin Electric's overall water systems offering.

Little Giant Pump Company, now Franklin Electric – Water Transfer Systems, offers the industry a well-respected brand of products – Little Giant. Founded on quality, availability, service, innovation and value, Franklin Electric continues to bring the Little Giant brand name advantage through *Pumps. People. Partnerships.*

Franklin Electric is a global leader in the production and marketing of systems and components for the movement of water and automotive fuels. Recognized as a technical leader in its specialties, Franklin serves customers around the world in residential, commercial, agricultural, industrial, municipal, and fueling applications.

Long recognized as the world's largest manufacturer of submersible electric motors, Franklin Electric has been able to leverage its expertise in motor applications to grow and serve several different markets. The principal application for Franklin products is water well pumping systems, where the company offers pumps, motors, drives, and controls. In addition, Franklin Electric produces a vast array of products for fueling systems and the water transfer market.

With 3,200 employees worldwide, Franklin Electric is a global manufacturer with over 20 manufacturing and distribution facilities located in the United States, Germany, Czech Republic, Italy, Mexico, Canada, Australia, South Africa, China, and Japan.

Little Giant products are produced to the following ISO standards:
Quality – 9001:2000
Environmental – 14001:2004

RoHS Compliant

Franklin Electric
3810 North Tulsa
Oklahoma City, Oklahoma 73112
Tel: +1 405-947-2511
Fax: +1 405-942-2431
Email: export@LittleGiantPump.com
www.LittleGiantPump.com



Franklin Electric

©2009 Franklin Electric Co., Inc.
Little Giant® is a registered trademark of Franklin Electric Co., Inc.
Form 996836 2/09